




Fluorosilicone release liner K1

Components

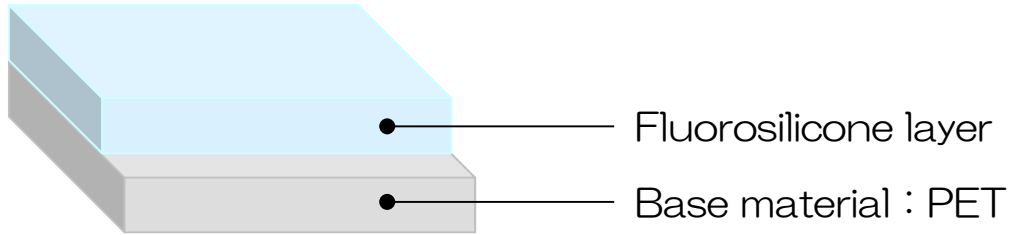

Physical property data

	Unit	Representative values
Peel strength	cN/19mm	10

【Peel strength measuring method】

Tape : 3M™ Polyimide Film Tape 5413

Peel speed : 0.3 m/min

Peel degrees : 180 degrees

After left at temperature of 70 degrees C for 20 hours.

※ The values in the table are not guaranteed values but representative values.

※ The values in the table are measured with 50 μm liners.



FUJIKO CO.,LTD.

284-2 Minamiko, Kawanishi-cho, Marugame-shi,
Kagawa-ken, Japan
763-0092
TEL: +81-877-28-6111 / FAX: +81-877-28-6114