


Non-silicone Release Liner

HP-A

Features

Excellent at solvent resistance, this is a non-silicone release liner. Also excellent at wettability, it is of heavy release as compared to silicone release liners.

Components

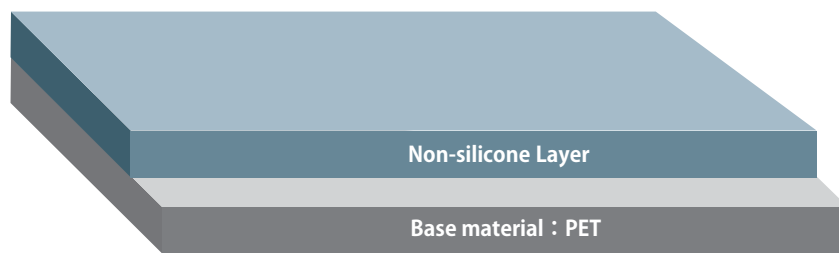

Physical property data

Properties	Unit	Typical value
Peel strength	mN/25mm	2000
Contact angle	degree	97.7

Peel strength measuring method

Tape : Nitto tape No.31B
Peel speed : 0.3 m/min
Peel degrees : 180 degrees
Conditions : After left at normal temperature for 20 hours.

※ The values in the table are not guaranteed values but representative values.
※ The values in the table are measured with 75 μm liners.



Fujiko Co.,Ltd.



+81-877-28-6111



+81-877-28-6114



284-2 Minamiko, Kawanishi-cho, Marugame-shi,
Kagawa-ken, Japan 763-0092