


Non-silicone Release Liner

HP-A0

Features

This non-silicone release liner is suitable for various substrates material. While having the same release performance as silicone types, its specialty is no silicone migration .

Components

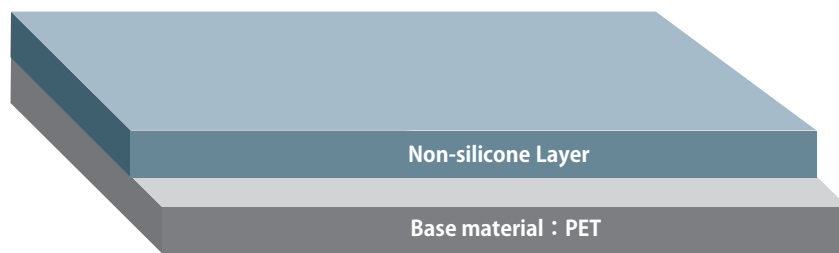

Physical property data

Properties	Unit	Typical value
Peel strength	mN/25mm	250
Contact angle	degree	107

Peel strength measuring method

Tape : Nitto tape No.31B
Peel speed : 0.3 m/min
Peel degrees : 180 degrees
Conditions : After left at normal temperature for 20 hours.

※ The values in the table are not guaranteed values but representative values.
※ The values in the table are measured with 75 μm liners.



Fujiko Co.,Ltd.



+81-877-28-6111



+81-877-28-6114



284-2 Minamiko, Kawanishi-cho, Marugame-shi,
Kagawa-ken, Japan 763-0092

IP-RL-037

www.fujiko.jp