


# Non-silicone Release Liner

# HP-A3

## Features

Excellent at solvent resistance, this is a non-silicone release liner. Also excellent at wettability, it is of heavy release as compared to silicone release liners.

## Components

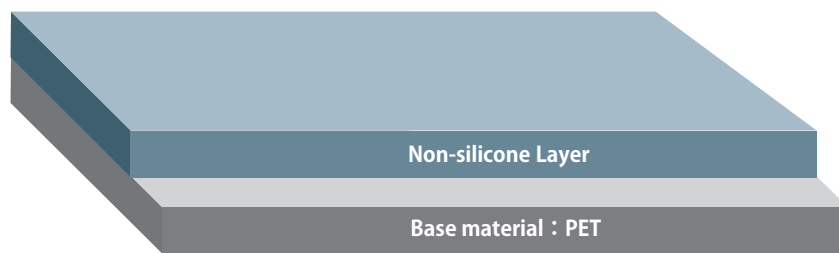

## Physical property data

Properties	Unit	Typical value
Peel strength	mN/25mm	4000
Contact angle	degree	94.4

## Peel strength measuring method

Tape : Nitto tape No.31B  
Peel speed : 0.3 m/min  
Peel degrees : 180 degrees  
Conditions : After left at normal temperature for 20 hours.

※ The values in the table are not guaranteed values but representative values.  
※ The values in the table are measured with 75 μm liners.



**Fujiko Co.,Ltd.**



+81-877-28-6111



+81-877-28-6114



284-2 Minamiko, Kawanishi-cho, Marugame-shi,  
Kagawa-ken, Japan 763-0092