


# Non-silicone Release Liner

# HP-SA3



This release liner is treated with silicone-modified resin.  
Compared to other common non-silicone types, it is of light release.

## Components

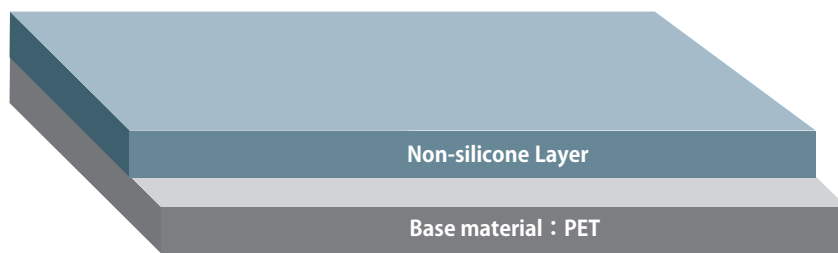

## Physical property data

Properties	Unit	Typical value
Peel strength	mN/25mm	1500
Contact angle	degree	98

## Peel strength measuring method

Tape : Nitto tape No.31B  
Peel speed : 0.3 m/min  
Peel degrees : 180 degrees  
Conditions : After left at normal temperature for 20 hours.

※ The values in the table are not guaranteed values but representative values.  
※ The values in the table are measured with 75 μm liners.



**Fujiko Co.,Ltd.**



+81-877-28-6111



+81-877-28-6114



284-2 Minamiko, Kawanishi-cho, Marugame-shi,  
Kagawa-ken, Japan 763-0092