


Non-silicone Release Liner

HP-SA5



This release liner is treated with silicone-modified resin.
Compared to other common non-silicone types, it is of light release.

Components

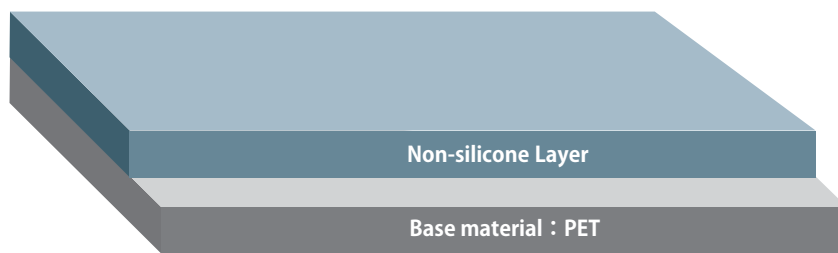

Physical property data

Properties	Unit	Typical value
Peel strength	mN/25mm	2700
Contact angle	degree	95

Peel strength measuring method

Tape : Nitto tape No.31B
Peel speed : 0.3 m/min
Peel degrees : 180 degrees
Conditions : After left at normal temperature for 20 hours.

※ The values in the table are not guaranteed values but representative values.
※ The values in the table are measured with 75 μm liners.



Fujiko Co.,Ltd.



+81-877-28-6111



+81-877-28-6114



284-2 Minamiko, Kawanishi-cho, Marugame-shi,
Kagawa-ken, Japan 763-0092

www.fujiko.jp