

Non-silicone Release Liner


HP-TY1R

Features

This non-silicone release liner is excellent at solvent resistance.

Being heavy release as compared to silicone release liner type, this liner is excellent at wettability and heat resistance.

Components

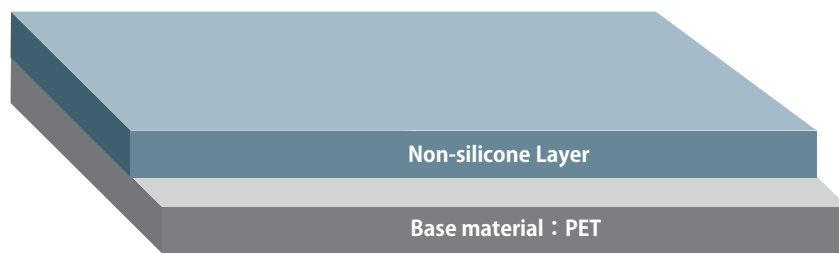

Physical property data

Properties	Unit	Typical value
Peel strength	mN/25mm	3000
Contact angle	degree	93

Peel strength measuring method

Tape : Nitto tape No.31B
Peel speed : 0.3 m/min
Peel degrees : 180 degrees
Conditions : After left at normal temperature for 20 hours.

※ The values in the table are not guaranteed values but representative values.
※ The values in the table are measured with 75 μm liners.



Fujiko Co.,Ltd.



+81-877-28-6111



+81-877-28-6114



284-2 Minamiko, Kawanishi-cho, Marugame-shi,
Kagawa-ken, Japan 763-0092